
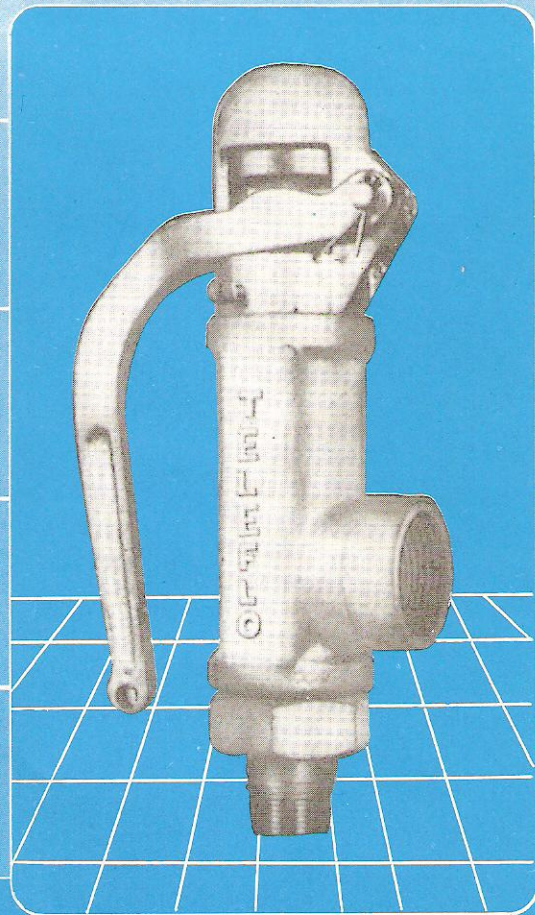



# Teletron

# SAFETY RELIEF VALVES

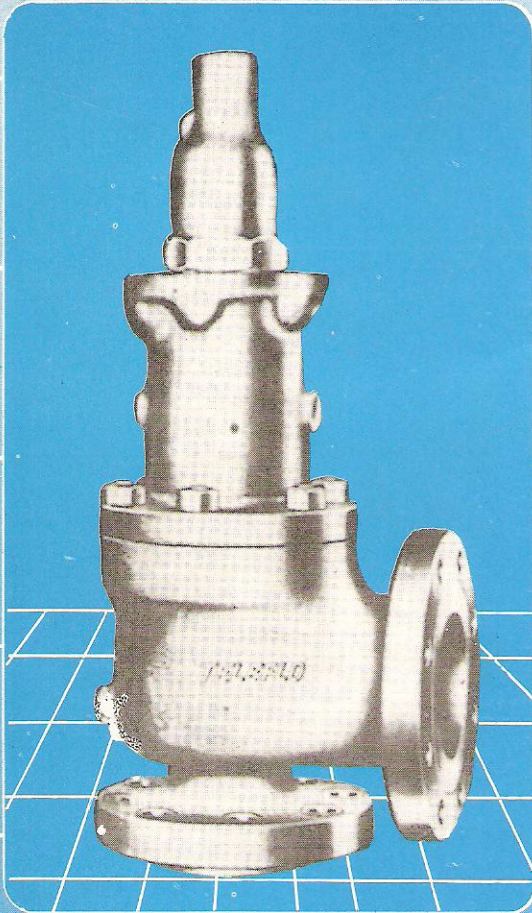

API Design-Type Tested-Safety & Relief Valves-Imported Spring-Full Nozzle-Full lift-Bellows Sealed-Suitable For All Gases Liquids & Steam-Under I.B.R, C.C.E. Lloyds etc.


## FOR PROCESS INDUSTRIES


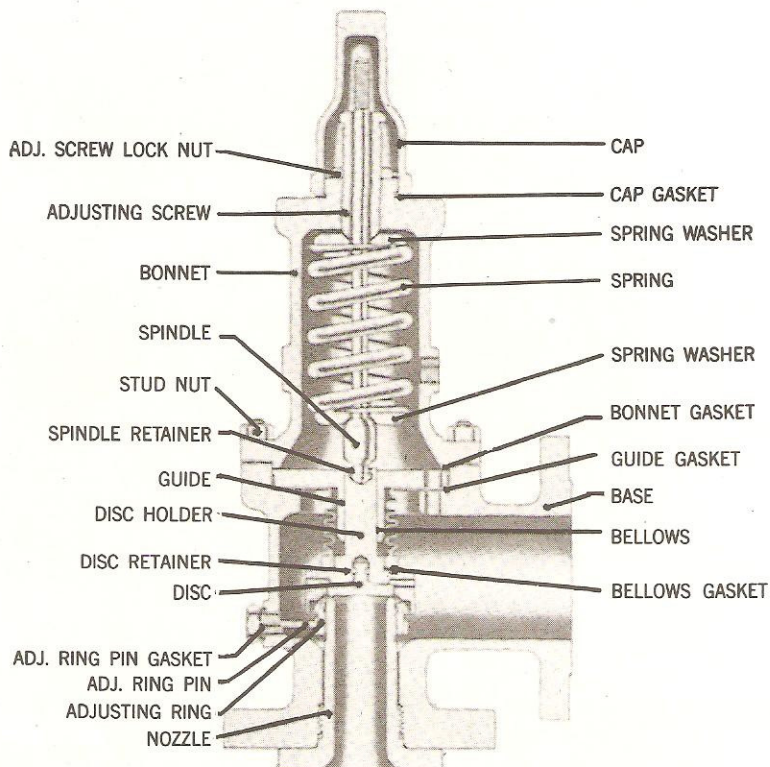


## INTRODUCTION

A market study carried out by TELEFLO revealed, the large dependence of this country on imported Relief Valves is due to lack of availability of reliable and well designed types. The outcome was another First Time In India Product-Standardised Safety Relief Valves, manufactured by TELEFLO are of a very high standard suitable to the chemical industries for all services including hard to handle fluids.

## TELETRON Numbering System (Flanged Valves)

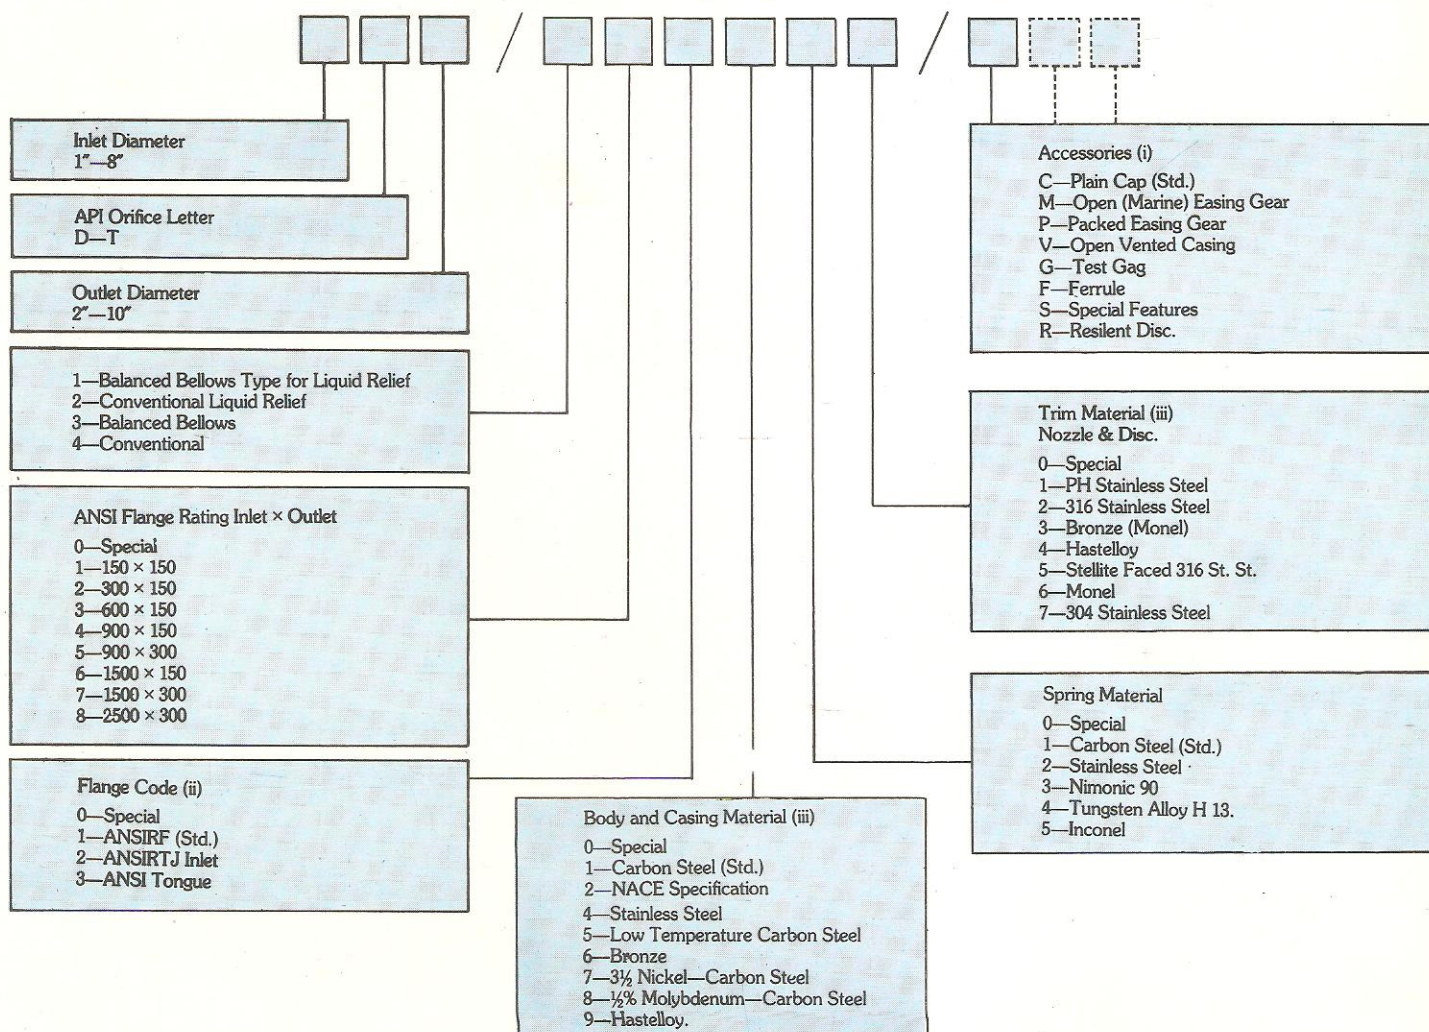

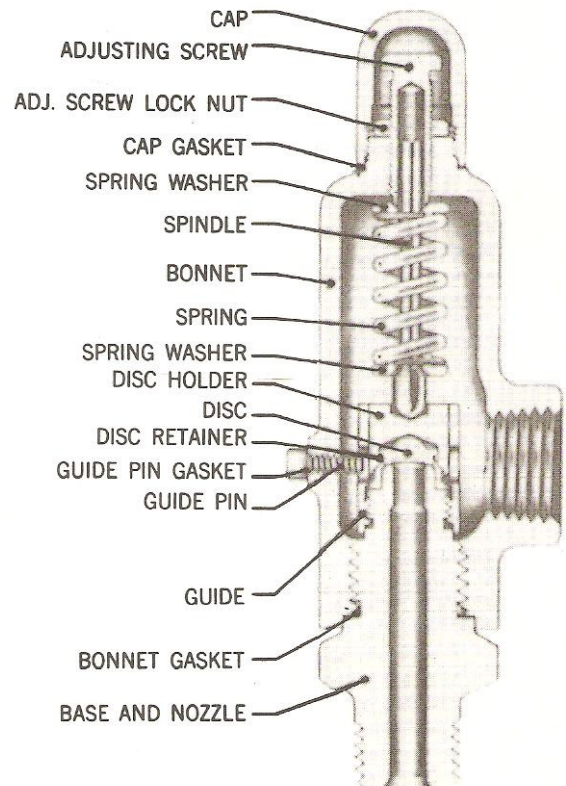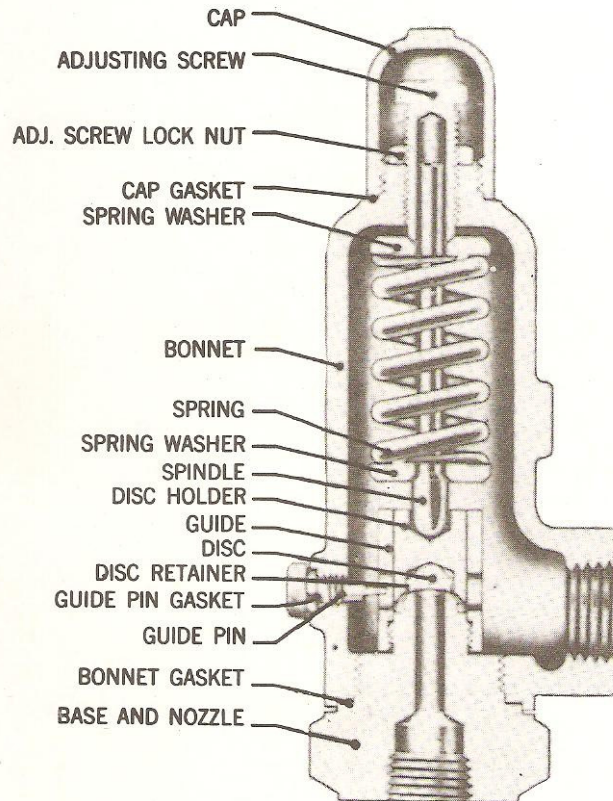


## BAR STOCK RELIEF VALVE TYPE—200 B SAFETY RELIEF VALVES

This is a range of small bore Safety Relief Valves, available in Screwed, Socketweld, Flanged Construction, or flanged-inlet and Screwed-outlet connections. These are low cost valves, due to Simplicity of construction.

	TYPE	ORIFICE AREA in	SIZE	A mm	B mm	C mm	WEIGHT APPROX.
SCREWED X SCREWED SOCKET-WELD X SOCKET-WELD CONNECTION	200B-1	0.040	1/2 x 1/2	85	55	215	5
	200B-2	0.060	3/4 x 3/4	85	65	215	6
	200B-3	0.110	1 x 1	85	75	215	6
	200B-4	0.196	1 1/2 x 1 1/2	100	75	300	6
FLANGED X FLANGED CONNECTION	200B-5	0.110	3/4 x 1	90	95	300	6.5
	200B-6	0.196	1 x 1 1/2	100	105	300	8.5
	200B-7	0.196	1 1/2 x 2	115	120	300	15
	200B-8	0.196	2 x 2	115	120	300	18
	200B-9	0.442	1 1/2 x 2	115	120	380	17
	200B-10	0.442	2 x 2	115	120	380	20

NOTE: FOR OTHER MODELS/SIZES ASK FOR CARTIFIED DRAWINGS.

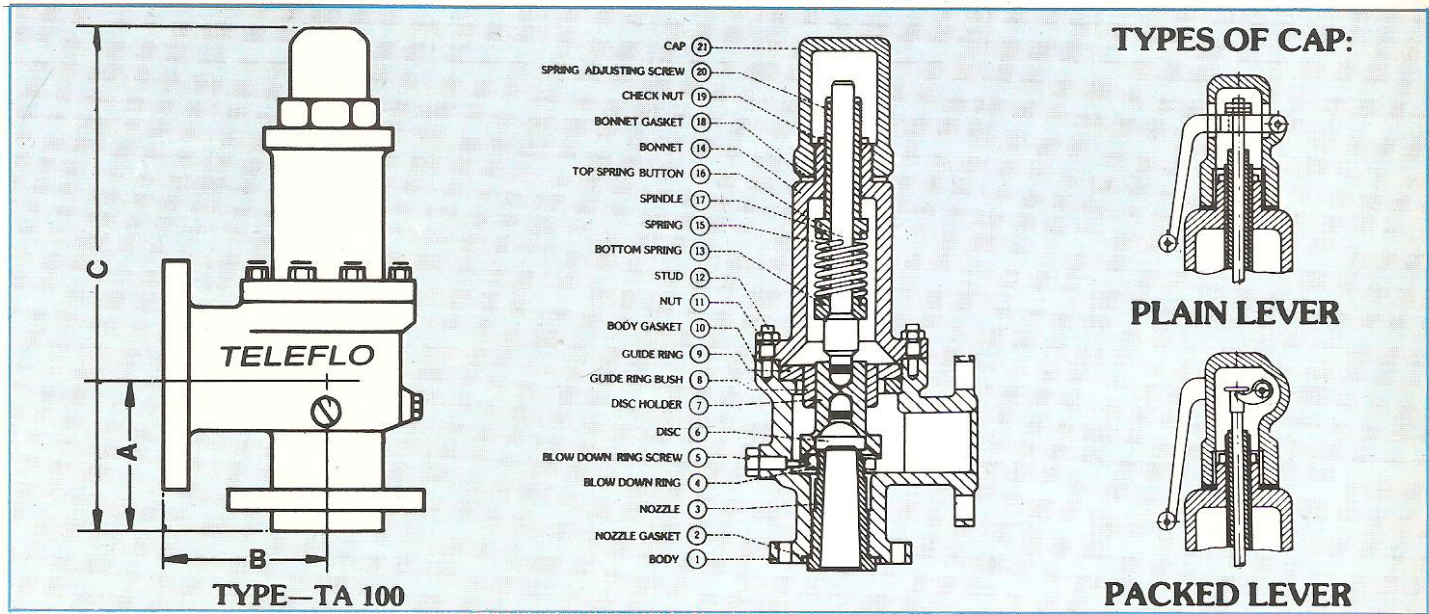

**FLANGED SAFETY RELIEF VALVE (API-MODEL) TYPE-TA 100**

Orifice	VALVE SIZE	MAX. PR. RATING PSIG	A mm	B mm	C mm (Aprox.)	Wt. Kg.
D	1 D 2	600	105	114	300	15
0.110 in <sup>2</sup>	1½ D 2	1500	105	114	300	
E	1 E 2	600	105	114	350	18
0.196 in <sup>2</sup>	1½ E 2	1500	105	120	350	18
F	1½ F 2	600	105	120	350	23
0.307 in <sup>2</sup>	1½ F 2½	1500	124	120	350	25
G	1½ G 2	600	105	120	350	25

350	25
380	27
415	40
400	25
415	40
450	30
520	50
520	50
750	100
520	50
750	100
750	100
767	120
751	120
910	190
795	260
1100	380
1100	450

G	1½ G 2	600	105	120
0.503 in <sup>2</sup>	1½ G 2½	900	124	120
	2 G 3	1500	130	124
H	1½ H 3	600	130	124
0.785 in <sup>2</sup>	2 H 3	1500	130	124
J	2 J 3	600	130	124
1.287 in <sup>2</sup>	3 J 4	1500	155	160
K	3 K 4	600	155	160
1.838 in <sup>2</sup>	3 K 6	1500	180	180
L	3 L 4	300	155	160
2.853 in <sup>2</sup>	4 L 6	1500	180	180
M	4 M 6	900	180	180
3.600 in <sup>2</sup>				
N	4 N 6	900	180	180
4.34 in <sup>2</sup>				
P	4 P 6	900	180	180
6.380 in <sup>2</sup>				
Q	6 Q 8	600	240	240
11.050 in <sup>2</sup>				
R	6 R 8	300	240	240
16.00 in <sup>2</sup>	6 R 10	600	275	280
T	8 T 10	300	275	280
26.0 in <sup>2</sup>				

NOTE: Above dimensions are based on present design subject to change. Please ask for certified drawings.

**100**

ANK OF MAHARASHTRA.



**CATALOGUE NO-SRV/**

CONTACT:

**M/S. TELEFLO**

H.O.: 70 D/3, CENTRAL AVENUE ROAD, NEXT TO B  
NEAR CHEMBUR RLY. STATION, BOMBAY-400 071.

TEL.: 5555345

FAX : (022)-5553689